




WELLTEC SR-15/40

SR-15/40 is often used for facades internally and externally, but can also be used in soffits, furniture and ceilings.

Welltec offers one of the most diverse range of standard and bespoke profiles, materials and finishes for the external envelope, with all flashing and trimming, to give a perfect finish to the project. These profiles also have the option of perforations in order to meet you transparency requirements.

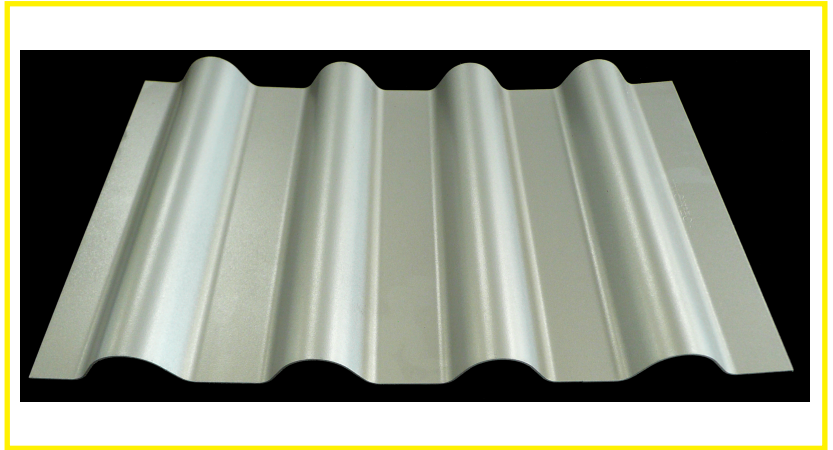

PROPERTIES:

Type:	Welltec SR-15/40
Cladding Width:	1150mm
	5500mm
Maximum Length:	
Material:	Aluminium, Mild Steel, Stainless Steel, Yellow Metals
Thickness:	
Finishes:	0.8mm - 1.5mm Mill, Anodised (Aluminium), Powder coated, Specialist PPC, PVDF

NOTE: Perforation options available, please call us

SUGGESTED APPLICATIONS:



cladding



ceiling panels



partitions

DIMENSIONS:

